

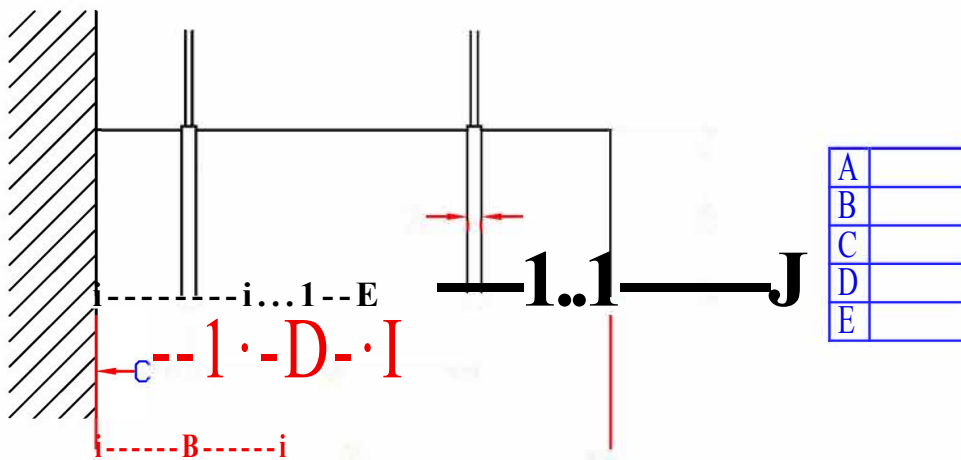
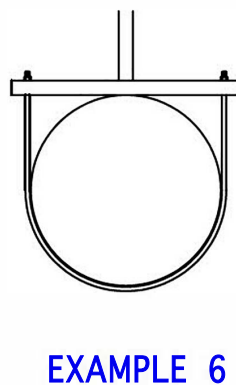


- ## OBTAINING A QUOTE FROM HEAT COVER MANUFACTURING ON EXHAUST INSULATION SYSTEMS

REQUIRED INFORMATION FOR STRAIGHT PIPE AND PIPE BRACKETS

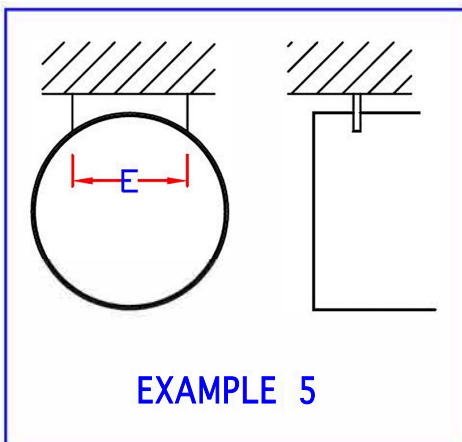

INDICATE BRACKET TYPE WHERE RELEVANT

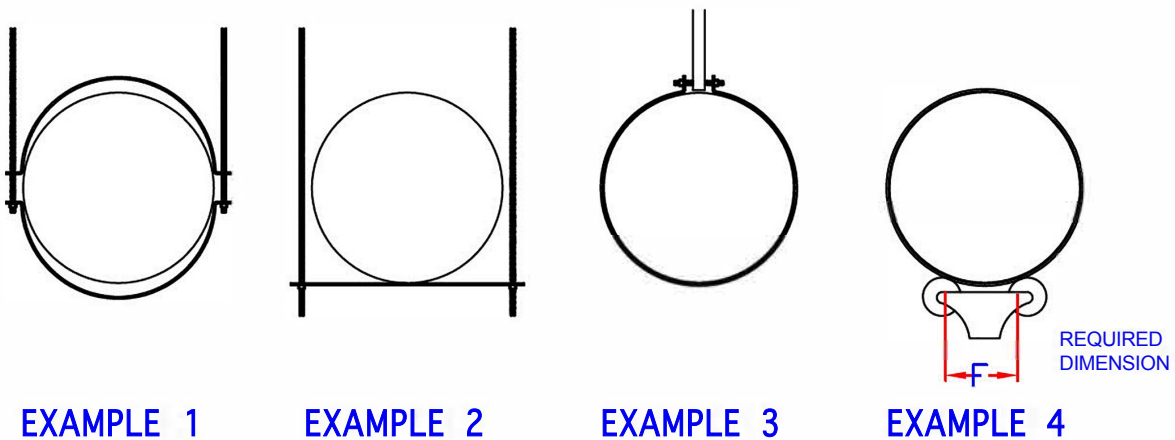



REQUIRED INFORMATION FOR FLEXES, FLANGES, AND ELBOWS


FLEX AND FLANGES

FLEXES

A	OD	
B	LENGTH	


FLANGES

C	OD	
D	Flange Width	

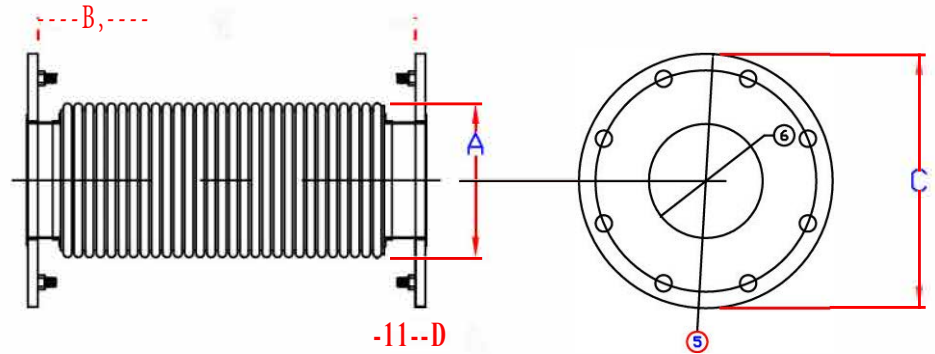


go ELBOWS

A	OD	
B	Radius Length	
C	Extension 1	
D	Extension 2	

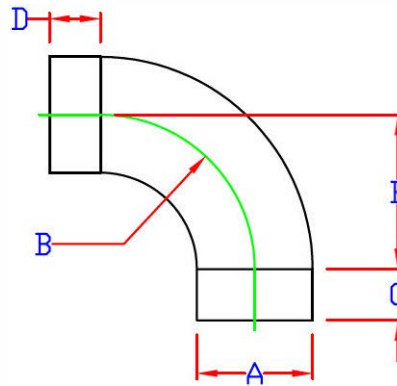


MISCILANEOUS ELBOWS

A	OD	
B	Anale (if known)	
C	Outer Arc Length	
D	Inner Arc Length	

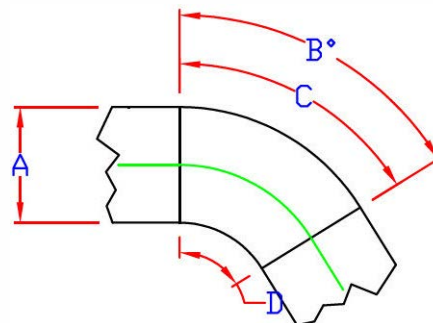

REQUIRED SILENCER INFORMATION

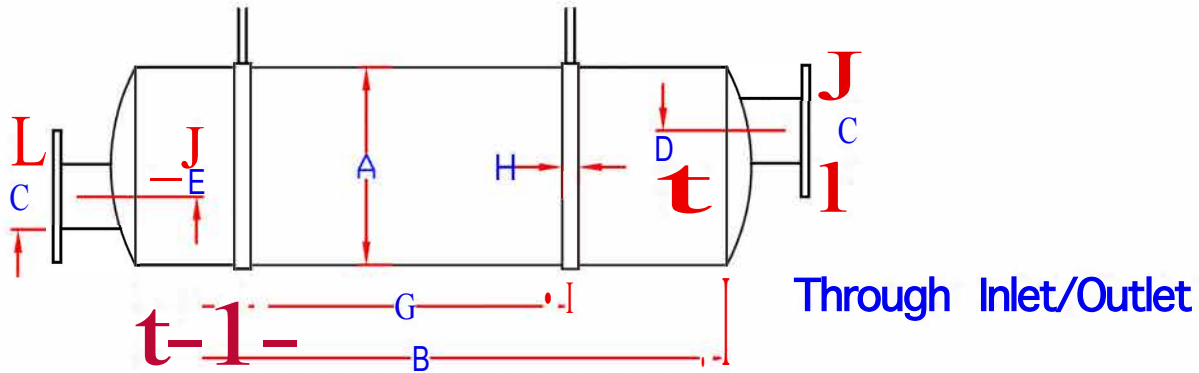

ALL SILENCER VERSIONS


A	0	
B	Weld to weld length	
C	Inlet/outlet OD	
D	Outlet offset (0 if N/A)	

THRU INLET/OUTLET VERSION ONLY


E	Inlet offset (0 if N/A)	
F	Support 1 Offset (if applicable)	
G	Support 2 Offset (if applicable)	
H	Support Width	

SIDE INLET VERSION ONLY


I	Inlet offset	
J	Support 1 Offset (if applicable)	
K	Support 2 Offset (if applicable)	

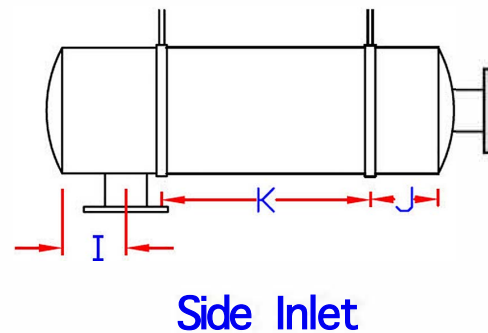


TYPICAL SILENCER HANGER/SUPPORT DRAWING




EXAMPLE 1



EXAMPLE 2

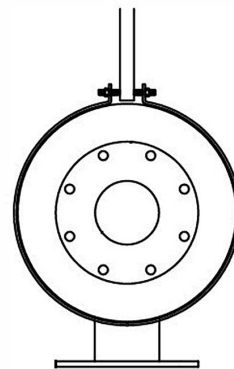

EXAMPLE 3

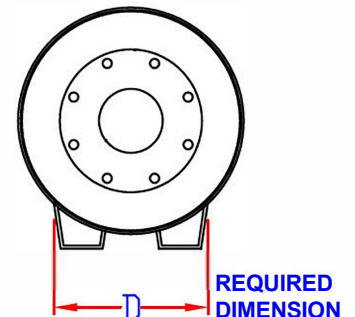

EXAMPLE 4

Please indicate the relevant support system.